



PAT TRAP® SKEET SPECIFICATION SHEET



Fully Automatic Pat-Trap® Skeet Trap Machine

- **More registered targets are thrown from Pat-Traps than from any other automatic trap machine!**
- **Five Case Turret (675 Targets).**
- **Operates from standard 115VAC, 15 Amp, 60 Hz. Power Source.**
- **Electronically operated solenoid release for “Instant response”.**
- **3/4 H.P. Direct Drive Hydraulic Pump with synthetic oil for reliable virtually maintenance free operation in all temperature conditions.**
- **High Quality “Soft-Shift” Hydraulic Valves for Smooth Operation of Optional Wobble Cylinder.**
- **Vibration Free.**
- **Sealed Ball Bearings.**
- **Base Dimensions 30” Wide by 21.5” Deep.**
- **Height Requirements 44” (Minimum) - 47” (Preferred)**
- **Use with manual Pull Cord.**
- **No Gear Boxes to break down or complex electronics that overheat.**
- **No Target Guide Springs to create target dust for cleaner operation.**
- **“G” Series Electronics for improved reliability**
- **Optional Wobble Skeet Version Available with all Hydraulic Vertical Controls.**
- **Most Consistent Target Presentation.**


- **Made in The USA.**
- **US Patents Numbers 5249563 and 6176229**
- **One Year Parts and Labor Warranty**



PAT TRAP® SKEET SPECIFICATION SHEET




Simple Controls for Windage and Elevation

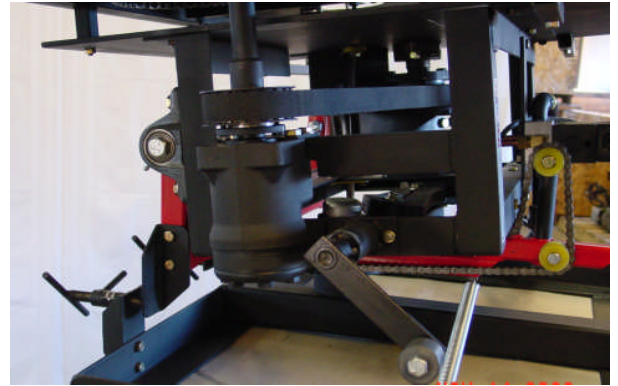


Side View of Skeet - Main Spring Crank




Main Shaft Clutch Assembly Eliminates Vibration

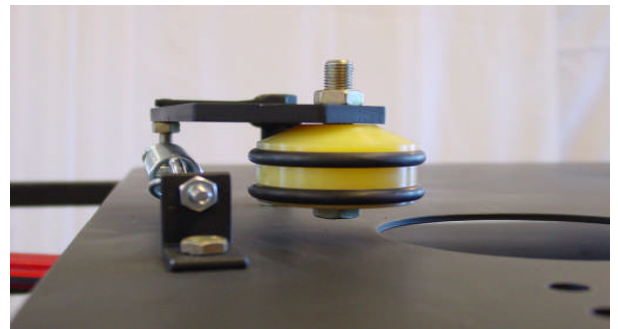

Maintenance Free Elevated Rollers

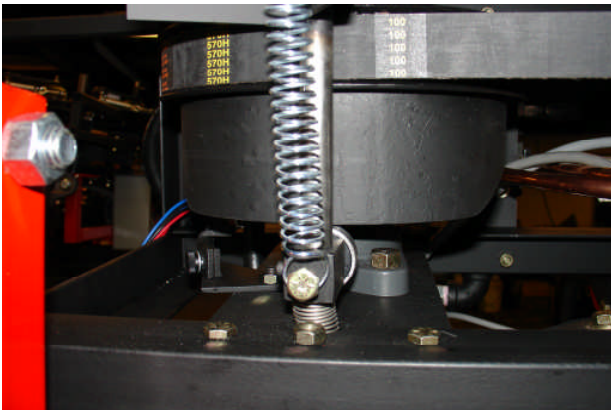

Maintenance Free Cam Operated Target Elevator

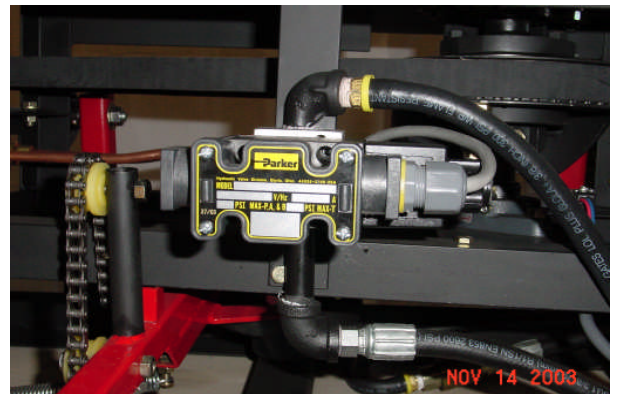

Hydraulic Operation for Throw Arm & Turret



3/4 HP Farm Duty Motor and Direct Drive Pump



Rugged Throw Arm for Consistent Targets